


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

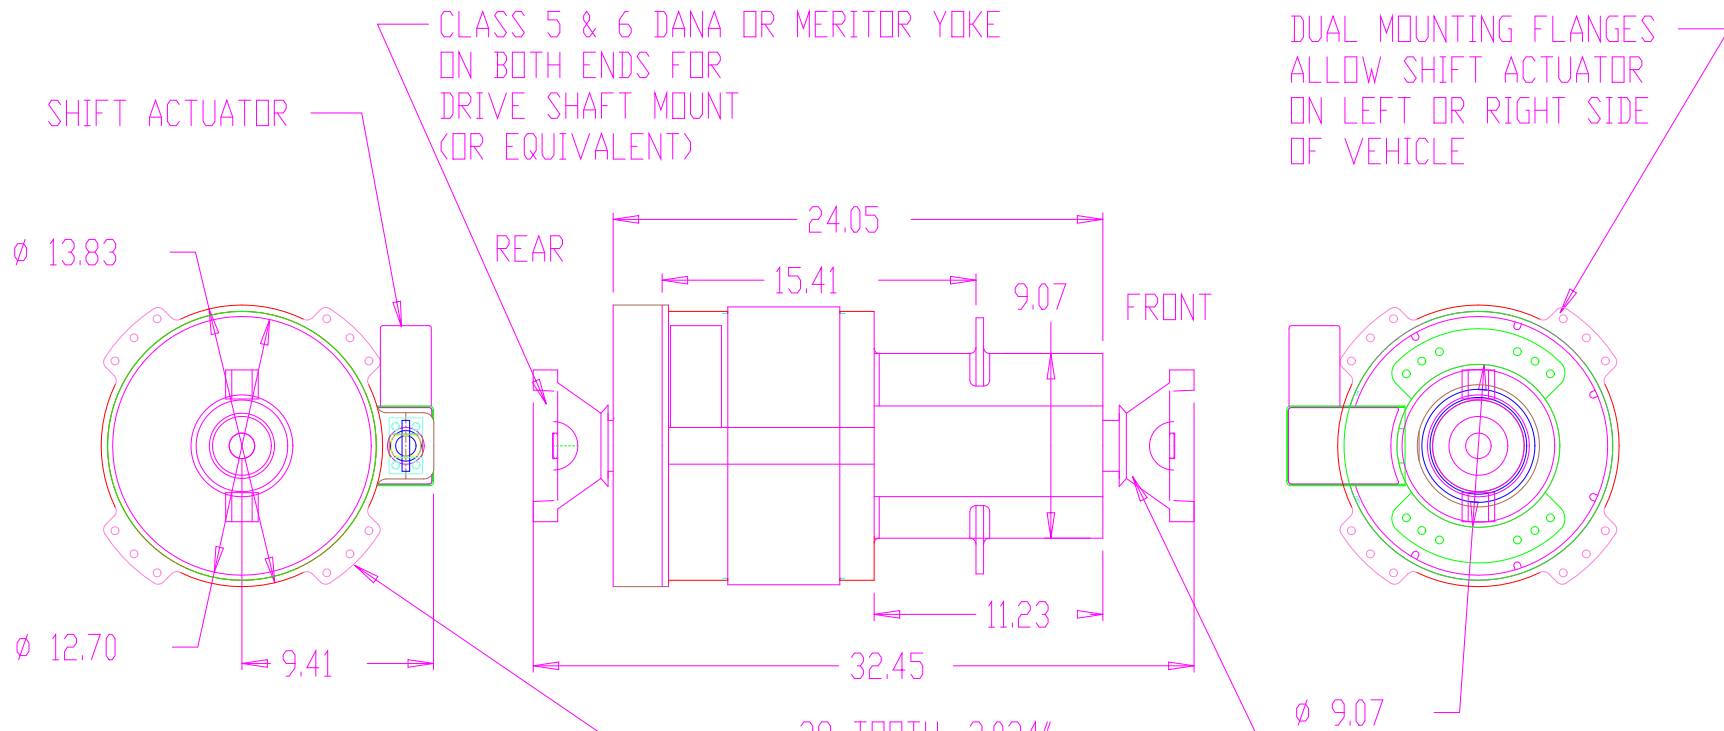

SHIFT ACTUATOR

CLASS 5 & 6 DANA OR MERITOR YOKE
ON BOTH ENDS FOR
DRIVE SHAFT MOUNT
(OR EQUIVALENT)

DUAL MOUNTING FLANGES
ALLOW SHIFT ACTUATOR
ON LEFT OR RIGHT SIDE
OF VEHICLE

Ø 13.83

REAR

FRONT

Ø 12.70

9.41

39 TOOTH, 2.024"
MAJOR DIA. INVOLUTE
SPLINE FOR CLASS 5 & 6

Ø 9.07

MOUNTING HOLE PATTERN
ALLOWS +/- 11.5 OR 23 DEG.
DEVIATION FROM HORIZONTAL

VEHICLE SPECIFIC MOUNTING ARM KIT
USES NEOPRENE SHOCK MOUNTS
(4) PLACES.

STANDARD TOLERANCES - UNLESS OTHERWISE NOTED: 0.00 = +/- .010" 0.000 = +/- .003 0.0000 = +/- .0010"	VARIABLE TORQUE MOTORS, LLC		4501 EARHART LN. FT. WAYNE, IN 46809 TOLL FREE (888)-747-6633	
	CLASS 5 & 6 MOTOR OUTLINE			
CADKEY DATABASE - NO MANUAL REVISIONS	SIZE B	FSCM NO.	DWG. NO. 3106	REV
SCALE		SHEET 1 OF 1		