

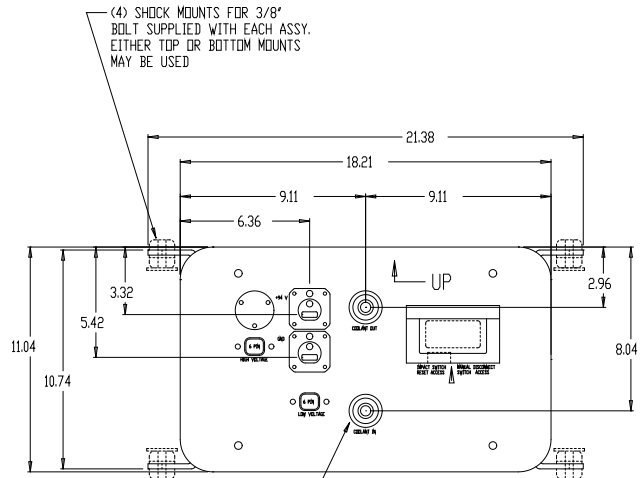


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

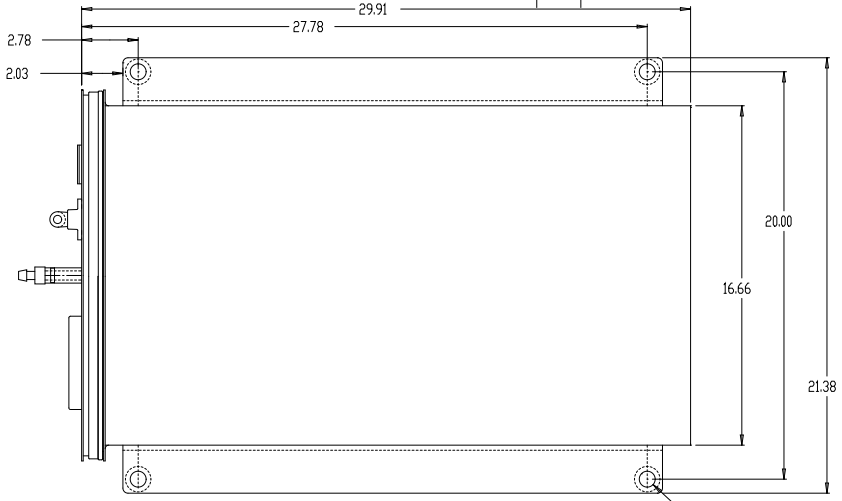

(4) SHOCK MOUNTS FOR 3/8" BOLT SUPPLIED WITH EACH ASSY. EITHER TOP OR BOTTOM MOUNTS MAY BE USED

BARB FOR 1/2" I.D. COOLANT HOSE (2 PL.)

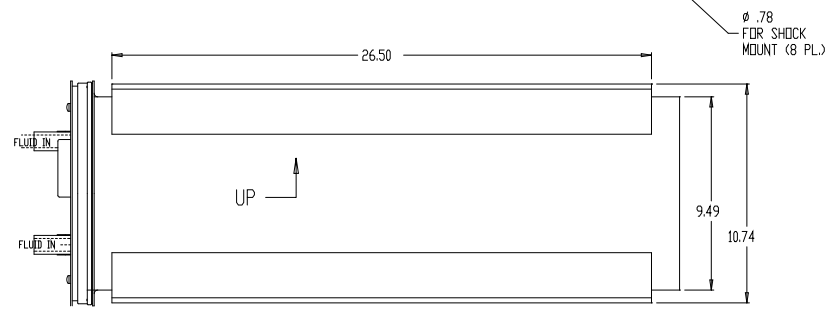

STANDARD TOLERANCES - UNLESS OTHERWISE NOTED: 0.00 = +/- .010" 0.000 = +/- .003 0.0000 = +/- .0010"	VARIABLE TORQUE MOTORS, LLC		4501 EARHART LN. FT. WAYNE, IN 46809 TOLL FREE (888)-747-6633	
	HYBRID UCAP OUTLINE REV. 03			
CADKEY DATABASE - NO MANUAL REVISIONS	SIZE B	FSCM NO.	DWG NO. 9380C11A	REV
SCALE		SHEET 1 OF 1		